

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
29 July 2004 (29.07.2004)

PCT

(10) International Publication Number  
**WO 2004/062792 A2**

(51) International Patent Classification<sup>7</sup>: **B01J 19/00,**  
G01N 31/10

(21) International Application Number:  
PCT/US2004/000049

(22) International Filing Date: 6 January 2004 (06.01.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
10/336,907 6 January 2003 (06.01.2003) US

(71) Applicant (for all designated States except US): UOP  
LLC [US/US]; 25 East Algonquin Road, Des Plaines,  
Illinois 60016-6100 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): BRICKER, Mau-  
reen, L. [US/US]; Uop Llc, 25 East Algonquin Road,  
Des Plaines, Illinois 60016-6100 (US). SACHTLER,  
J.W., Adriaan [US/US]; Uop Llc, 25 East Algonquin  
Road, Des Plaines, IL 60016-6100 (US). MCGONEGAL,  
Charles, P. [US/US]; Uop Llc, 25 East Algonquin Road,  
Des Plaines, Illinois 60016-6100 (US). KRAWCZYK,


Mark, A. [US/US]; Uop Llc, 25 East Algonquin Road,  
Des Plaines, Illinois 60016-6100 (US). ALEXANIAN,  
Ara, J. [US/US]; Uop Llc, 25 East Algonquin Road, Des  
Plaines, Illinois 60016-6100 (US). PLASSEN, Martin  
[NO/NO]; Sintef, 124 Blindern, Oslo 0314 (NO).

(81) Designated States (unless otherwise indicated, for every  
kind of national protection available): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,  
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,  
ZW.

(84) Designated States (unless otherwise indicated, for every  
kind of regional protection available): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),  
Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), Euro-  
pean (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR,  
GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK,  
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,  
ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: PROCESS AND ASSEMBLY FOR SIMULTANEOUSLY EVALUATING A PLURALITY OF CATALYSTS

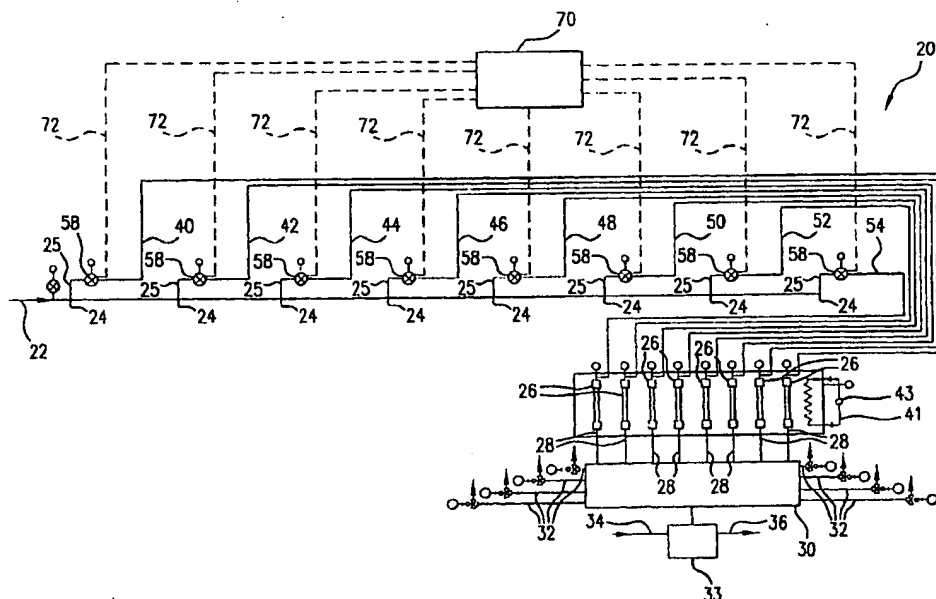

(57) Abstract: A process and an assembly for simultaneously evaluating a plurality of catalysts is provided wherein the flow rate of a reactive fluid to each of a plurality of reactors is automatically adjusted based on the measured amount of catalyst sample in each reactor to concurrently obtain a substantially identical fluid space velocity in each of the reactors.

BEST AVAILABLE COPY

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1

- *without international search report and to be republished upon receipt of that report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

**"PROCESS AND ASSEMBLY FOR SIMULTANEOUSLY  
EVALUATING A PLURALITY OF CATALYSTS"**

**BACKGROUND OF THE INVENTION**

[0001] This invention relates generally to the testing and evaluation of catalyst materials and, more particularly, to a process and assembly for simultaneously evaluating a plurality of catalysts.

[0002] When formulating new catalysts, a large number of candidate catalyst compositions are typically synthesized. It then becomes important to evaluate the various candidate catalysts to determine and identify those formulations that are the most successful in catalyzing a particularly desired reaction under a selected set of reaction conditions. Activity and selectivity are two key characteristics of a catalyst that are commonly determinative of the success or desirability of the catalyst. The term "activity" commonly refers to the rate of conversion of reactants by a given amount of catalyst under specified conditions. The term "selectivity" commonly refers to the degree to which a given catalyst favors one reaction compared with other possible reactions. From the activity and selectivity values for a given catalyst, yields may be calculated. Thus, it is typically advantageous to evaluate or compare the performance of various catalyst materials based on the activity, selectivity and/or yield achieved with the various catalyst materials.

[0003] Traditionally, the activity, selectivity, and yield performance of a catalyst have been evaluated using a sequential approach. In such an approach, each catalyst sample or candidate is typically independently serially tested in a selected reactor at one or more sets of specified reaction conditions. In practice, suitable test reactors for particular applications may take various forms such as micro, pilot, bench-top and lab-scale reactors, for example. In most cases, such a test reactor is operated in a fixed bed mode. Alternatively, when the ultimate envisioned end use of a catalyst is in a fluidized bed application, catalyst samples may be tested using a test reactor operated in a fluidized bed mode. After completion of the tests at one or more sets of conditions, the tested catalyst sample is typically removed from the test reactor and the next catalyst sample is loaded into the respective reactor. The testing is then repeated on the freshly loaded catalyst sample. The process is repeated sequentially for each of the desired catalyst formulations. As will be appreciated, the application of such a process to the testing of numerous various catalyst formulations can be undesirably time-consuming.

[0004] Developments in combinatorial chemistry were at first largely concentrated on the synthesis of chemical compounds. Recently, combinatorial approaches have been applied to the testing of catalysts in an effort to expedite the catalyst evaluation process. The use of combinatorial approaches to catalyst evaluation has, however, been generally limited or  
5 restricted such as due to difficulties or an inability of ensuring the generation of a self-consistent combinatorial data set. In particular, combinatorial testing in which library members are evaluated at different space velocities typically results in data sets which are not self-consistent, e.g., performance differences may be at least in part attributable to differences in space velocities rather than to differences in the formulation of the various catalyst samples. For example,  
10 because a combinatorial approach commonly involves the loading of many samples for each run, the process of individually measuring out a specified weight for each sample can become extremely burdensome. Moreover, because combinatorial synthesis generally produces or results in a wide variety of materials such as may have widely varying properties, such as density, even reactors wherein materials have been loaded in a constant volume manner may  
15 contain significantly varying weights of material.

[0005] In view thereof, there is a need and a demand for procedural developments in combinatorial catalyst evaluation such as to better ensure self-consistent data sets such as by permitting or facilitating evaluation or comparison of each of multiple catalyst samples at a substantially identical space velocity. Further, there is a need and a demand for an assembly  
20 which facilitates and permits the generation of a self-consistent catalyst evaluation data set such as wherein each of multiple catalyst samples is concurrently evaluated at a substantially identical space velocity.

#### SUMMARY OF THE INVENTION

[0006] A general object of the invention is to provide an improved process and assembly for  
25 simultaneously evaluating a plurality of catalysts.

[0007] A more specific objective of the invention is to overcome one or more of the problems described above.

[0008] The general object of the invention can be attained, at least in part, through a process for evaluating a plurality of catalyst samples for catalysis of at least a portion of a fluid. In  
30 accordance with one preferred embodiment of the invention, such a process involves forming an array of a plurality of parallel reactors wherein each of the reactors contains a measured amount of at least one of the plurality of catalyst samples. A quantity of the fluid is passed to each of the

reactors at a flow rate automatically adjusted based on the measured amount of the at least one of the plurality of catalyst samples in each reactor to concurrently obtain a substantially identical first space velocity in each of the reactors.

5 [0009] The invention further comprises an assembly for evaluating a plurality of catalyst samples for catalysis of at least a portion of a fluid wherein a measured amount of catalyst sample is disposed in each of an array of N parallel reactors. In accordance with one preferred embodiment of the invention, such an assembly includes at least N fluid flow regulators and a control unit in operational communication with the at least N fluid flow regulators. Each regulator is in fluid flow regulation communication with a corresponding one of the parallel  
10 reactors and is effective to regulate a rate of flow of the fluid to the corresponding one of the parallel reactors. The control unit is effective to automatically adjust the rate of flow of the fluid to the corresponding reactor based upon the measured amount of catalyst in the reactor, to concurrently obtain a substantially identical first space velocity in each of the reactors.

15 [0010] The prior art generally fails to provide processes and assemblies for the evaluation of a plurality of catalysts in a manner which is as effective as may be desired. In particular, the prior art generally fails to provide processes and assemblies conducive to a greater or more widespread use of combinatorial approaches to catalyst evaluation as prior combinatorial approaches to catalyst evaluation have typically been limited or restricted due to a difficulty or an inability of ensuring the generation of a self-consistent combinatorial data set.

20 [0011] As used herein and as identified above, references to catalyst "activity" generally refer to the rate of conversion of reactants by a given amount of catalyst under specified conditions and references to catalyst "selectivity" generally refer to the degree to which a given catalyst favors one reaction compared with another possible reaction.

[0012] References herein to space velocities as being "substantially identical" are to be  
25 understood to generally refer to space velocities that differ from one another by no more than  $\pm 10\%$  and, more preferably, differ from one another by no more than  $\pm 6\%$ .

[0013] "Weight Hourly Space Velocity", sometimes abbreviated as "WHSV", generally refers to the mass flow rate of total feedstock or selected feed component per mass of loaded catalyst, with units of inverse time, e.g.,  $\text{hr}^{-1}$ .

30 [0014] "Liquid Hourly Space Velocity", sometimes abbreviated as "LHSV", generally refers to the volumetric flow rate of total feedstock or selected feed component (typically expressed at a reference temperature) per volume of loaded catalyst, with units of inverse time, e.g.,  $\text{hr}^{-1}$ .

[0015] Other objects and advantages will be apparent to those skilled in the art from the following detailed description taken in conjunction with the appended claims and drawing.

#### BRIEF DESCRIPTION OF THE DRAWING

[0016] The FIGURE is a simplified schematic of an assembly for evaluating a plurality of catalyst samples in accordance with one preferred embodiment of the invention. The FIGURE illustrates only one of multiple banks of reactors.

#### DETAILED DESCRIPTION OF THE INVENTION

[0017] The present invention provides an improved process and assembly for simultaneously evaluating a plurality of catalysts.

10 [0018] In general terms, the present invention applies a combinatorial approach for simultaneously testing a plurality of catalyst samples. As described in greater detail below, the invention provides an approach that is rapid and yet provides an accurate basis for comparison of catalyst performance characteristics determined for each of a plurality of catalyst samples. The plurality of catalyst samples used in the practice of the invention may be any number beginning  
15 with at least two. Different catalyst samples may be of the same or a different formulation, or the same formulations may be present in different ratios of a mixture. Furthermore, identical catalyst sample formulations or mixtures may be repeated within the plurality, especially such as when statistical analysis are being conducted.

[0019] In accordance with the invention, an array of a plurality of parallel reactors is formed  
20 wherein each of the plurality of reactors contains a measured amount of at least one of the plurality of catalyst samples. The array of parallel reactors may be as few as two reactors, but preferably contains 6, 8, 12, 24, 48, 96, 384, or 1264 reactors. It is generally preferred that the array of parallel reactors be arranged in a row and column formation similar to that of a microtiter tray.

25 [0020] A common objective of catalyst evaluation testing is to produce or provide a comparison of yields, such as calculated from the activity and selectivity, based on the use of each of a plurality of catalyst samples in order to determine which catalyst sample is most suitable for use in connection with a given reaction. As identified above, to facilitate comparisons of yield, activity, and/or selectivity for various catalyst samples in a plurality, it is  
30 desirable that there exist a common basis for comparison. The present invention provides such a common basis for comparison for different catalyst samples by automatically adjusting the flow

rate of fluid to each of the plurality of reactors based on the measured amount of the catalyst sample in each reactor to concurrently obtain a substantially identical fluid space velocity in each of the reactors.

5 [0021] Catalyst activity and/or selectivity may be determined from compositional analysis of each of the effluents (discussed in detail below), and the percent yield in each of the reactors of the array may be calculated. It is preferred to compare the percent yield of the catalyst samples to determine which of the catalyst samples exhibits the most preferred performance.

10 [0022] Those skilled in the art and guided by the teachings herein provided will appreciate that the broader practice of the invention is not necessarily limited by or to the mode of operation of the catalyst bed reactors employed in the practice of the invention. Thus, it will be understood that the invention can, if desired, be practice employing fixed or fluid bed reactors, as may be desired for specific applications. It is currently generally believed preferred that the invention be practiced employing or utilizing fixed bed reactors. In particular, fixed bed operation may generally be found easier to run as in typical fluidized bed operations the catalyst materials are  
15 generally only fluidized over a limited range of catalyst masses, particle sizes and flow rates whereas fixed bed operations generally do have such limitations. Furthermore, fixed bed operations can avoid difficulties that may be encountered with simulating fluidized bed hydrodynamic behavior on a micro-combinatorial scale as well as facilitate a system or assembly scale-up, such as may be desired for a commercial operation.

20 [0023] A fluid feed including one or more reactants is introduced to the catalyst bed reactor such as by any commonly known manner. The term "reactants" is sometimes used in the description of the process of the invention, but it should be understood that many chemical reactions require only a single reactant and the use of the plural form of the word reactant is for ease of explanation and not meant to limit the invention to only those reactions requiring more  
25 than one reactant. Thus, it is to be understood that the present invention can be successfully applied to chemical reactions having only one reactant as well as those having two or more reactants.

[0024] Those skilled in the art and guided by the teachings herein provided will also appreciate that the broader practice of the invention is not necessarily limited by or to application  
30 with particular or specific reactant feed materials. Further, particular fluid feeds used in the practice of the invention may additionally contain or include one or more diluents, co-reactants or additives such as known to those skilled in the art and guided by the teachings herein provided. For example, suitable diluents useable in the practice of the invention may include air,

N<sub>2</sub>, H<sub>2</sub>, He, Ar; examples of suitable co-reactants useable in the practice of the invention may include air, O<sub>2</sub>, H<sub>2</sub>O, H<sub>2</sub>, N<sub>2</sub>, Cl<sub>2</sub> and NH<sub>3</sub> and examples of suitable additives useable in the practice of the invention include H<sub>2</sub>O, NH<sub>3</sub>, H<sub>2</sub>S, CO, CO<sub>2</sub>. It will be understood and appreciated by those skilled in the art and guided by the teaching herein provided that the

5 particular classification of at least certain these materials can differ based on the specifics or particulars of the operation. Furthermore, the broader practice of the invention is not necessarily limited to or by the classification of a particular added feed material as a diluent, co-reactant or additive, for example.

[0025] Furthermore, those skilled in the art and guided by the teaching herein provided will  
10 appreciate that the invention can be suitably applied to the various reactions such as can be conducted in such reaction vessels such as, for example, including partial oxidations, CO and/or NO<sub>x</sub> removals, chlorinations and aminations as well as heterogeneous catalysis such as hydrocarbon conversions wherein a reactant feed is composed of one or more selected hydrocarbons and a co-reactant such as hydrogen, air or oxygen. Examples of hydrocarbons for  
15 which practice of the invention may have particular application include paraffins such as propane, butanes, pentanes, hexanes and heptanes; aromatics such as benzene, toluene, and xylenes; and naphthenes such as cyclopentanes and cyclohexanes. It is to be understood, however, that the broader practice of the invention is not necessarily limited to or by operation with particular hydrocarbons or the conversion thereof.

20 [0026] After introduction and contact with each of the respective catalyst samples, a reaction by or of the reactants may be catalyzed. Of course, since catalyst performance evaluation is a goal of the invention, it is expected that some of the catalyst samples tested will not catalyze the reaction at all, or perhaps only very little.

[0027] When the reactants contact the catalyst sample beds, an effluent is formed. In an  
25 embodiment wherein each reactor contains a catalyst sample composed of different catalysts or blend of catalysts, it is expected that the effluent may vary considerably from catalyst sample to catalyst sample. Consequently, some effluents may contain largely reactant or other fluid feed component, and other effluents may contain largely product, with a wide variety of feed to product ratios therebetween possible.

30 [0028] The effluents may in turn be analyzed using at least one selected analytical technique to determine whether products have been formed, how much product has been formed, and/or which specific product compounds have been formed. Those skilled in the art and guided by the teachings herein provided will appreciate that various analytical techniques may be used



including any suitable technique for the type of information desired and components involved. In general, preferred techniques include, chromatography, spectroscopy, and nuclear magnetic resonance. Various different forms of chromatography and/or spectroscopy may be employed. Specific examples of chromatography and spectroscopy useable in the practice of the invention  
5 include liquid chromatography, gas chromatography, ultraviolet absorption spectroscopy, Raman spectroscopy, mass spectroscopy, visible absorption spectroscopy, ultraviolet-visible spectroscopy, atomic absorption spectroscopy, infrared absorption spectroscopy, and emission spectroscopy. While chromatography and spectroscopy methods are preferred, other acceptable techniques include but are not limited to fluorescence spectrometry, mass spectrometry, X-ray  
10 methods, radiochemical methods, electroanalytical methods, potentiometric methods, conductometric methods, electrogravimetric methods, coulometric methods, and voltammetry.

[0029] In accordance with one preferred embodiment of the invention, at least a portion of the effluent from each reactor is conveyed to the chosen analytical instrument. The effluents may be directly conducted to an analytical instrument, or aliquots of the effluents may be  
15 sampled and delivered to the location of the analytical instrument. In yet another embodiment, the effluents may be analyzed on-stream as they are removed from the reactors. In evaluating catalyst performance, observing trends of activity, selectivity, and yield over time can be valuable. Therefore, it may be desirable in particular applications that the effluent that is being withdrawn from each reactor be periodically or continuously analyzed as discussed above.  
20 Selectivity, activity, and/or yield may be determined upon the occurrence of each analysis, and trends in selectivity and/or activity observed over time. It is generally preferred that the effluents of each of the reactors be sampled simultaneously such that the analysis results are directly comparable and the time that each catalyst has been exposed to the reactant is the same. For quantitative results, the amounts of the effluents analyzed are measured. Alternatively, the  
25 reactors can be started sequentially to account for the offset in analysis time.

[0030] The specific analysis performed will typically depend on the particular application and desired information. For example, if only the activities of a plurality of catalyst samples are to be determined and compared, an effluent analysis measuring the amount of reactant consumed may be sufficient. Also, a qualitative analysis for the composition of the effluent can, if desired,  
30 be used as an indication of catalyst activity. However, it is generally preferred to have both activity and selectivity information and, in such instances, the analytical technique would be selected to measure the concentrations or quantities of the different components present in each effluent. Using information on both activity and selectivity, the yield of the desired products can

be calculated and compared between the individual catalyst samples. It is preferred that the sampling of the effluent for each reaction be conducted simultaneously. A benefit of simultaneous sampling is that the results obtained for each catalyst bed are more readily comparable since each catalyst bed would have been exposed to the reactant for the same period of time. This is perhaps best understood via a description of an example. In a 48-reactor array with a single analyzer/detector, if the sampling of the 48 effluents were to occur sequentially, and the time needed for each sampling was one minute, there would be a 48 minute difference in time between sampling of the first and the last of the reactors. Therefore, the overall time the last catalyst sample would be exposed to the reactant would be 48 minutes longer than the overall time the first catalyst sample would be exposed to the reactant. It is known that the activity and selectivity of a catalyst may change over the period of time the catalyst is in use. Thus, during such a 48 minute time period between the sampling of the first and the last of the reactors, the activity and/or selectivity of the catalyst in the last reactor may have changed significantly as compared to that of the catalyst in the first of the reactors. Thus, it is to be appreciated that sequential sampling has an increased likelihood of introducing error since the period of time that a catalyst is in use, rather than being identical for all reactors, could become another variable to be accounted for in the analysis.

[0031] Turning to the FIGURE, there is illustrated a simplified schematic of an assembly, generally designated with the reference numeral 20, for evaluating a plurality of catalyst samples in accordance with one preferred embodiment of the invention. For ease of explanation, the process and apparatus will be described herein in reference to a 48-reactor system where the reactors are grouped into six banks, with each bank containing eight reactors. The FIGURE shows only the first bank of eight reactors. The other five banks of eight reactors each are not shown.

[0032] As shown, a reactant-including fluid feed stream feed stream 22 feeds into the assembly 20. The fluid feed is preferably gaseous but may be a liquid. The feed may be from cylinders and, if the feed is in the form of a gas, may be saturated with other components. In particular embodiments, the feed may be a liquid and such as processed through a pump (e.g., a syringe).

[0033] The reactant-containing fluid feed stream feed stream 22 is separated, via respective branch connectors 24, into eight separate portions, each designated by the reference numeral 25. The eight separated portions 25 are not regulated as to flow at this point. As described in greater detail below, the eight separated portions 25 are employed to form eight corresponding

reactor feed streams individually designated 40, 42, 44, 46, 48, 50, 52 and 54, respectively.

[0034] The eight separated portions 25 are each simultaneously conducted through a respective flow regulator or controller 58 to form the eight corresponding reactor feed streams 40, 42, 44, 46, 48, 50, 52 and 54, respectively. Therefore, a set of eight flow controllers are used  
5 for each of the six banks of reactors. As will be appreciated, the invention advantageously allows or permits flow control to be conducted continuously over a range of fluid flow rates in a manner not allowed or permitted with systems which rely on the incorporation and use of fixed restrictors.

[0035] As described in greater detail below, the flow regulators 58 are used to individually  
10 regulate or control the flow rate of fluid feed in each of the reactor feed streams 40, 42, 44, 46, 48, 50, 52 and 54, respectively. Depending upon the application and the data desired or variables being investigated, the set of feed streams may be regulated or controlled to provide the same feed fluid flow to the reactors or they may be controlled at different flows. Those skilled in the art and guided by the teachings herein provided will appreciate that such flow regulation  
15 or control may be done on the basis of or in the form of gravimetric or volumetric flow regulation or control as may be desired for a particular application.

[0036] Each of the respective pressure transducers 60 monitors the pressure of the reactor feed in the respective feed line 40, 42, 44, 46, 48, 50, 52 and 54. The respective reactor feed streams are individually simultaneously introduced to a corresponding associated individual  
20 reactor 26. The reactors 26 may be of any type used in combinatorial evaluations, with preferred reactors being of the type described in EP 1108467 A2. As identified above, the number of reactors or vessels which make up the plurality may vary dependent upon the particular application and will typically vary between from two vessels to hundreds of reactors or vessels. Banks of reactors have generally been constructed in multiples of eight. Consequently, it is  
25 generally preferred to have at least eight reactors or vessels in the plurality.

[0037] The reactors 26 each houses or contains a measured amount of at least one of a plurality of catalyst samples. As identified above, each of the reactors may contain a catalyst sample composed of different catalyst materials, different mixtures of catalyst materials, or, alternatively, the same compositional mixture of catalyst materials but where the components are  
30 in different ratios, or the like. In addition, replicate catalyst samples may be included within the array of the parallel reactors.

[0038] The system assembly 20 also includes a control unit 70 in operational communication with the fluid flow regulators 58, as signified by the control lines 72, and effective to

automatically adjust the rate of flow of the fluid to the respective corresponding reactors 26 based on the measured amount of catalyst in each reactor 26, to concurrently obtain a substantially identical space velocity in each of the reactors 26. As will be appreciated, various control units such as known to those skilled in the art and guided by the teachings herein provided are useable in the practice of the invention. Examples of such control units include LabVIEW, available from National Instruments Corp., Honeywell DCS (distributed control system) and ABB Siemens DSC, for example. Furthermore, in accordance with a preferred practice of the invention, such automatic adjustment of the rate of flow of the fluid to the reactors 26 can be preferably done continuously over a range of fluid flow rates such as to permit the obtaining of a substantially identical space velocity in each of the reactors without requiring that the reactors contain catalyst loads which are equal or differ from one another in any predetermined manner or by any discrete amount. As a result, the invention provides great flexibility in testing conditions while also simplifying and facilitating the manner of securing self-consistent data sets such as may be desired and useful in catalyst evaluations.

15 [0039] Those skilled in the art and guided by the teachings herein provided will appreciate that the fluid flow rate can be adjusted on a mass basis (e.g., mass flow rate) or a volumetric basis (e.g., volume flow rate), as may be desired in particular applications.

[0040] The effluent from each of the reactors 26 is conducted simultaneously, yet separately, in lines 28 to a sampling system 30 in order to sample the effluents for further processing such as analysis. The sampling of the effluent from each of the reactors 26 may be advantageously conducted simultaneously, as identified above. Alternatively, such sampling can be conducted in a sequential manner, if preferred.

20 [0041] When the effluents are not actively being sampled, the respective effluent can be conducted through an independent path, shown as the lines 32, to a proper venting system. As will be appreciated, dependent on the compounds employed and being treated in the system assembly 20, waste effluents may be treated to remove, convert or neutralize specific compounds, components or materials before being vented to the atmosphere. For certain applications, the effluents may be condensed and collected, such as for further use or disposal, as may be desired or appropriate therefor.

25 [0042] Joined to or connected with the sampling system 30 is a processing or analytical device, designated by the reference numeral 33. A gas chromatograph is an example of one suitable common form or type of analytical device for use in particular applications of the invention. As will be appreciated, however, other suitable types or forms of analytical

30

techniques such as described above may be used or employed in the practice of the invention. Consequently, it is to be understood that the broader practice of the invention is not necessarily limited by or to operation with a specific or particular analytical technique or sampling procedure.

5 [0043] The analytical device 33 has an input or carrier stream 34 and an analytical device effluent stream 36.

[0044] In addition, the reactors 26 may be, if desired and as shown, associated with a heater 41 having a controller 43 to provide controlled heat to the reactors. Alternatively, individual heaters may be employed for each or selected of the reactors 26.

10 [0045] It will further be appreciated by those skilled in the art and guided by the teachings herein provided that the above described assembly 20 may additionally contain or include additional components or features such as pressure transducers, check valves and pressure controllers, for example, as may be desired in particular applications.

[0046] As identified above, each of the plurality of reactors contains a measured amount of a catalyst sample. Those skilled in the art and guided by the teachings herein provided will appreciate that various techniques or means are available and may be used to provide or ensure that a measured amount of catalyst sample is present in particular reactors of the plurality. For example, such measured amount of catalyst sample can be of determined on a gravimetric or volumetric basis. In accordance with one preferred embodiment of the invention, such  
15 gravimetric measurement may be via indirect weighing of the catalyst sample such as by weighing a holder portion of the reactor of interest, loading the catalyst sample into the weighed holder portion, followed by weighing the catalyst sample-loaded holder portion of the reactor of interest. As will be appreciated, such loading of catalyst samples may be done on a volumetric basis, such as in accordance with a preferred embodiment of the invention, via the loading of  
20 catalyst samples of substantially identical volume into the various of the plurality of reactors. In such indirect weighing of the catalyst sample, the amount of the catalyst sample generally corresponds to the difference between the weight of the catalyst sample-loaded holder portion and the weight of the empty holder portion. In accordance with another preferred embodiment of the invention, such gravimetric measurement may be via direct weighing of the catalyst  
25 sample.  
30

[0047] In accordance with a preferred practice of the invention, the generation of a self-consistent catalyst evaluation data set is provided via concurrently evaluating each of the multiple catalyst samples at a substantially identical space velocity based on at least one of the

fluid feed components. As will be appreciated by those skilled in the art and guided by the teachings herein provided, such space velocities may be determined on an appropriate selected basis such as a weight hourly space velocity or a liquid hourly space velocity, for example.

Moreover, it is to be understood that while the broader practice of the invention is not

5 necessarily limited to application with specific or particular space velocities, the invention is currently conceived as being particularly advantageous in applications wherein the substantially identical space velocity in each reactor of the array is in a range from 0.1 to 1000 hr<sup>-1</sup>, with further specific embodiments having particular utility in applications wherein the substantially identical space velocity in each reactor of the array is in a range from 300 to 600 hr<sup>-1</sup> or,  
10 alternatively, in a range from 1 to 35 hr<sup>-1</sup>. As will be appreciated, interest in particular or specific range or ranges of space velocities will generally be dictated by catalyst chemistry and kinetics with particular emphasis on catalyst chemistry and kinetics that permit commercially amenable space velocities.

[0048] If desired and as may be preferred, one or more or, if desired, all of the  
15 catalyst-loaded reactors of the array may, after a period of time, be tested at a second selected substantially identical space velocity such as where the second substantially identical space velocity is the same or different from the first substantially identical space velocity at which such catalyst-loaded reactors of the array were originally or previously tested. Furthermore, one or more or, if desired, all of the catalyst-loaded reactors of such an array may, after a period of time,  
20 be tested at a third selected substantially identical space velocity such as where the third substantially identical space velocity is the same or different from either or both the first and the second substantially identical space velocity at which such catalyst-loaded reactors of the array were originally or previously tested.

[0049] Thus, the invention provides a process and an assembly for simultaneously evaluating  
25 a plurality of catalysts at a substantially identical space velocity such as to better permit the evaluation of such catalysts on the basis of self-consistent data sets.

[0050] It will be appreciated by those skilled in the art and guided by the teachings herein provided that while the invention has been described above making specific reference to an embodiment wherein a constant data set is obtained via operation at substantially identical space  
30 velocities, the invention can, if desired, be practiced such that flows are appropriately adjusted to obtain or result in substantially identical conversions. Furthermore, a hybrid manner of testing or operation such employing both constant space velocity and constant flow rate steps can, if desired, be employed.

[0051] Moreover, the method of the invention can, if desired, be repeated for a previously tested catalyst sample at a space velocity that is the same or differs from that at which the catalyst sample was previously tested.

[0052] The invention illustratively disclosed herein suitably may be practiced in the absence  
5 of any element, part, step, component, or ingredient which is not specifically disclosed herein. While in the foregoing detailed description this invention has been described in relation to certain preferred embodiments thereof, and many details have been set forth for purposes of illustration, it will be apparent to those skilled in the art that the invention is susceptible to additional embodiments and that certain of the details described herein can be varied  
10 considerably without departing from the basic principles of the invention.

## CLAIMS:

1. A process for evaluating a plurality of catalyst samples for catalysis of at least a portion of a fluid, the process comprising:  
forming an array of a plurality of parallel reactors wherein each of the plurality of  
5 reactors contains a measured amount of at least one of the plurality of catalyst samples and  
wherein a quantity of the fluid flows to each of the plurality of reactors at an adjustable rate; and  
automatically adjusting the flow rate of the fluid to each of the plurality of reactors based  
on the measured amount of the at least one of the plurality of catalyst samples in each reactor to  
concurrently obtain a substantially identical first space velocity in each of the reactors.
- 10 2. The process of claim 1 wherein the measured amount of the catalyst sample in at  
least one of the plurality of reactors is determined by weighing a holder portion of the at least  
one of the plurality of reactors, loading the catalyst sample into the weighed holder portion of the  
at least one of the plurality of reactors, and weighing the catalyst sample-loaded holder portion  
of the at least one of the plurality of reactors, preferably wherein the catalyst sample is loaded  
15 into the weighed holder portion of the at least one of the plurality of reactors on a volumetric  
basis and the catalyst sample loaded into each of the plurality of reactors is substantially  
identical in volume.
3. The process of claim 1 wherein the measured amount of the catalyst sample in  
each reactor is gravimetrically or volumetrically measured.
- 20 4. The process of claim 1 wherein the fluid comprises at least two components and  
the substantially identical space velocity in each reactor of the array is based on at least one of  
the fluid components.
5. The process of claim 1 wherein the substantially identical space velocity in each  
reactor of the array is a weight hourly space velocity or a liquid hourly space velocity.
- 25 6. The process of claim 1 wherein the substantially identical space velocity in each  
reactor of the array is in a range from 0.1 to 1000 hr<sup>-1</sup> and preferably from 1 to 35 hr<sup>-1</sup>.
7. The process of claim 1 additionally comprising automatically adjusting, after a  
period of time, the flow rate of the fluid to each of the reactors based upon the measured amount  
of catalyst in each reactor to concurrently obtain a substantially identical second space velocity  
30 in each reactor.
8. The process of claim 7 further additionally comprising repeating the step of  
automatically adjusting, after a period of time, the flow rate of the fluid to each of the reactors



based upon the measured amount of catalyst in each reactor to concurrently obtain a substantially identical third space velocity in each reactor.


9. The process of claim 1 wherein the automatic adjustment of the flow rate of the fluid to each of the reactors is continuous over a range of fluid flow rates.

5 10. An assembly for evaluating a plurality of catalyst samples for catalysis of at least a portion of a fluid wherein a measured amount of catalyst sample is disposed in each of an array of N parallel reactors, the assembly comprising:

at least N fluid flow regulators (58), each regulator (58) in fluid flow regulation communication with a corresponding one of the parallel reactors (26) and effective to regulate a  
10 rate of flow of the fluid to the corresponding one of the parallel reactors (26); and

a control unit (70) in operational communication with the at least N fluid flow regulators (58) effective to automatically adjust the rate of flow of the fluid to the corresponding reactors (26) based upon the measured amount of catalyst in each reactor (26), to concurrently obtain a substantially identical first space velocity in each of the reactors (26).

15

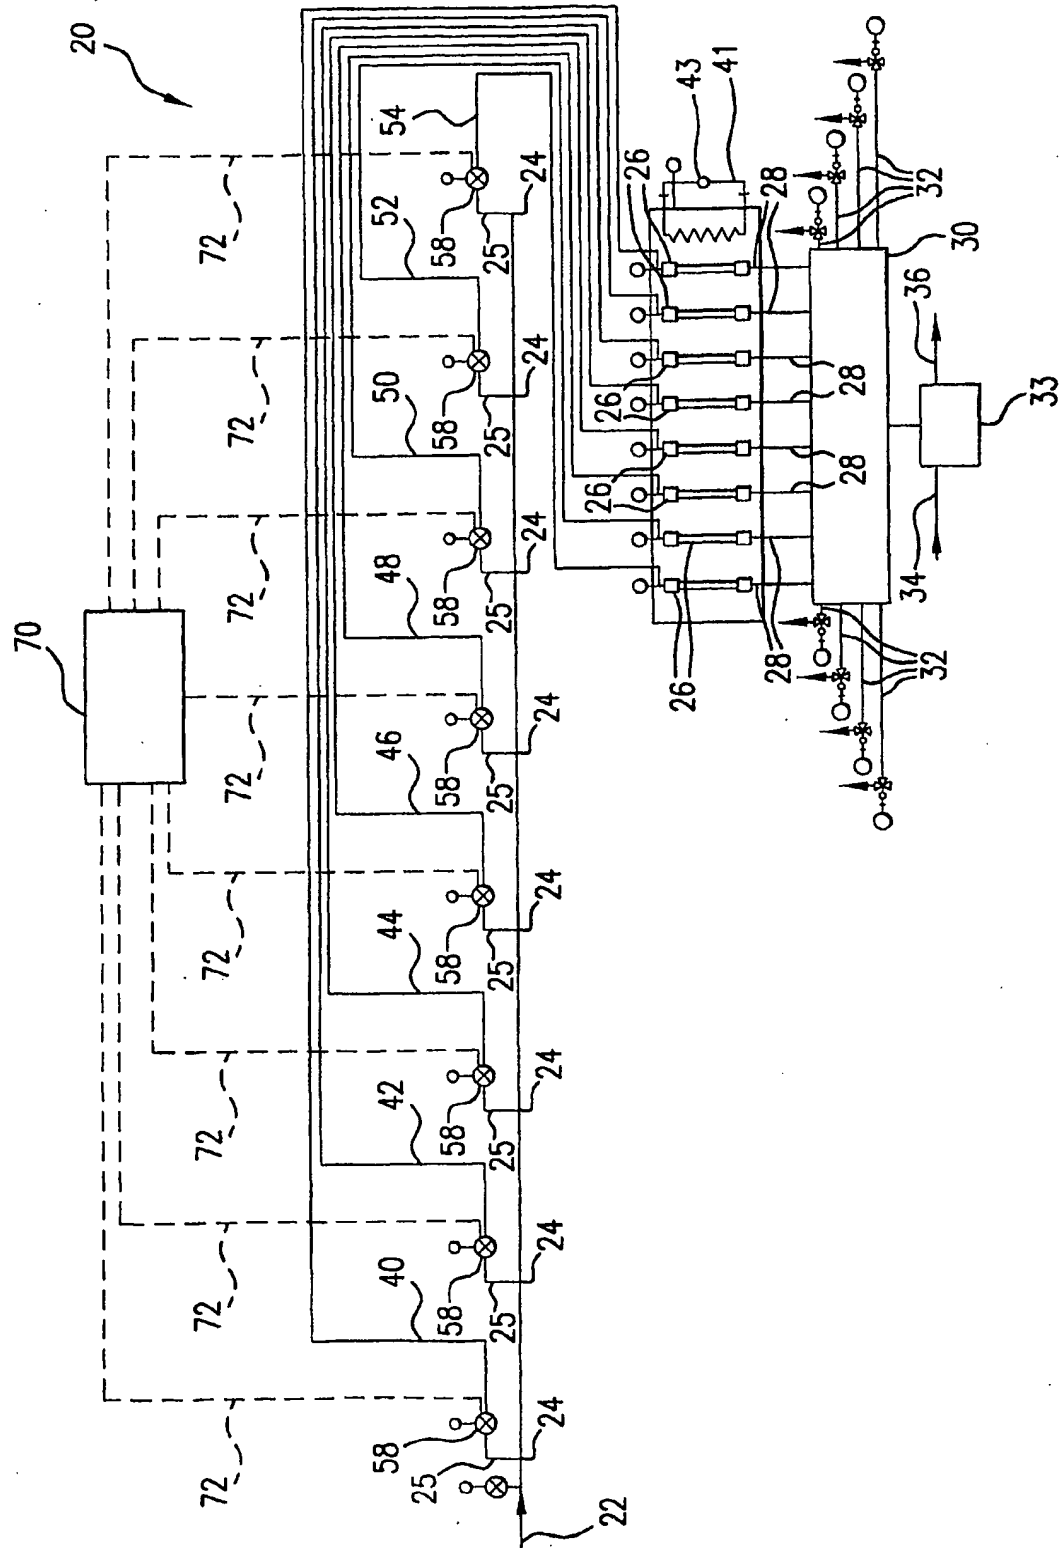

**BEST AVAILABLE COPY**